


DEXcell[®]

BRAND
Roof Board

One name for every application.

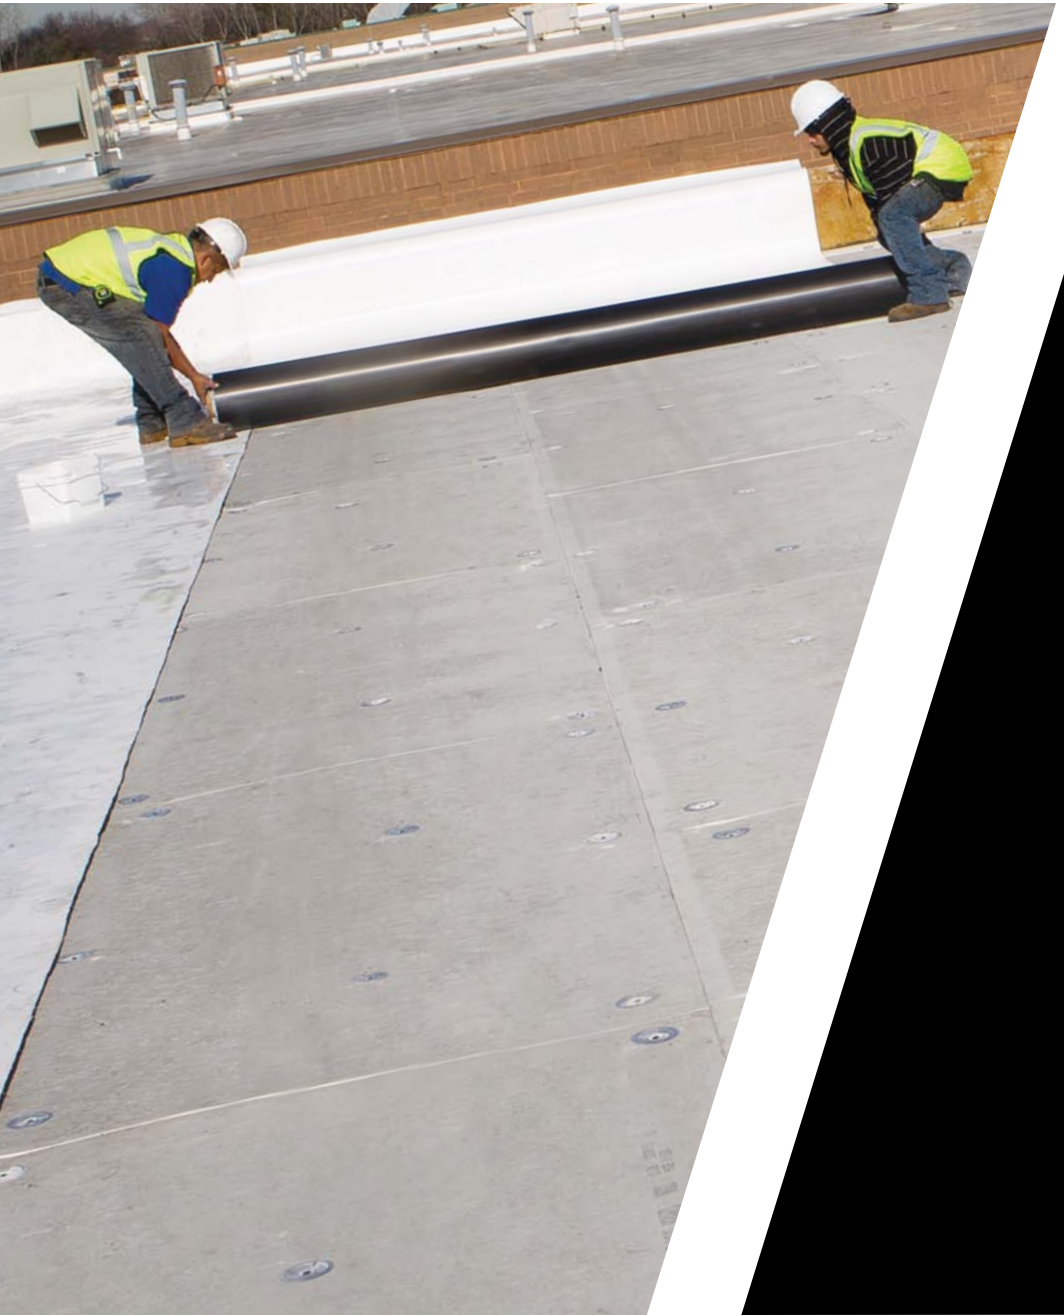

National 
Gypsum[®]

Need roof board options and technical expertise? We've got you covered.

Three Outstanding Products

The National Gypsum line of DEXcell® BRAND Roof Board covers the entire spectrum of commercial roofing applications. When a building houses expensive equipment or expensive people, DEXcell® Roof Boards will cover more than your roof.



- First, our DEXcell® BRAND Glass Mat Roof Board is recommended for mechanically attached systems, metal roof systems and wood shake underlayment. It's also an excellent thermal and fire barrier.
- Next, our DEXcell® BRAND FA Glass Mat Roof Board has a heavy-duty coated fiberglass facer and is ideal for fully adhered roof systems – from a vapor barrier substrate to the parapet wall.
- Finally, to provide customers with unprecedented versatility, National Gypsum makes DEXcell® BRAND Cement Roof Board. This board's superior moisture resistance makes it suitable for nearly every roof system.

Best Choice For All Applications

Roof System Applications	DEXcell® Glass Mat Roof Boards	DEXcell® FA Glass Mat Roof Boards	DEXcell® Cement Roof Boards
Single-Ply – Fully Adhered	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Single-Ply – Mechanically Attached	<input checked="" type="checkbox"/>	<input type="checkbox"/> *	<input checked="" type="checkbox"/>
Single-Ply – Self Adhered	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Modified Bitumen - Hot Mop	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Modified Bitumen - Cold Adhesive	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Modified Bitumen - Torch	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Modified Bitumen - Self Adhered	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Built-Up Roof (BUR)	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Spray Polyurethane Foam	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Fluid Applied	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Thermal Barrier	<input checked="" type="checkbox"/>	<input type="checkbox"/> *	<input checked="" type="checkbox"/>
Fire Barrier	<input checked="" type="checkbox"/>	<input type="checkbox"/> *	<input checked="" type="checkbox"/>
Substrate for Vapor Barrier	<input type="checkbox"/> *	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Substrate for Parapet Wall	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Vegetative "Green" Roof System	<input type="checkbox"/>	<input type="checkbox"/> *	<input checked="" type="checkbox"/>
Photovoltaic Roofing System	<input type="checkbox"/>	<input type="checkbox"/> *	<input checked="" type="checkbox"/>
Standing Seam Metal Roof System	<input checked="" type="checkbox"/>	<input type="checkbox"/> *	<input type="checkbox"/> *
Wood Shake Underlayment	<input checked="" type="checkbox"/>	<input type="checkbox"/> *	<input type="checkbox"/> *

Recommended Acceptable Not Recommended

* Indicates product applications that may be used successfully, but may not be optimal in terms of cost or performance as compared to the recommended product.

Note: In situations where prolonged excessive membrane surface temperatures may be experienced, such as dark-colored membranes in Southern climates, roof surfaces that experience reflected sunlight or photovoltaic installations, DEXcell® Cement Roof Board is the preferred DEXcell® product.

Fire barrier meets FM Class 1 and UL Class A Fire ratings for roofing systems up to unlimited slope per UL 790.

DEXcell® BRAND

Glass Mat Roof Board

DEXcell® BRAND Glass Mat Roof Board is recommended for mechanically attached single-ply membranes, metal and fire/thermal barrier applications. It's manufactured with coated fiberglass facers and an enhanced moisture-resistant gypsum core. And it's coated on the front, back and sides for easy handling.

Key Features

- High-density coverboard/thermal barrier
- Scores and snaps easily
- Manufactured to meet ASTM C1177
- Available in 1/4", 1/2" and 5/8" thicknesses, and 4'x4' and 4'x8' sizes
- Use as a part of a Class A, B or C roof covering. Tested in accordance with UL 1256 or FM 4450.



DEXcell[®]
BRAND
Glass Mat Roof Board

*A board
you'll get
attached to.*

DEXcell® BRAND

FA Glass Mat Roof Board

DEXcell® BRAND FA Glass Mat Roof Board is recommended for fully adhered single-ply membranes, modified bitumen (cold applied), fluid applied, metal, and spray foam. It's also used on the roof side of parapet walls.

Key Features

- High-density coverboard/thermal barrier
- Heavy-duty coated fiberglass facers for improved handling, strength and adhesion
- Scores and snaps easily
- Manufactured to meet ASTM C1177
- Available in 1/4", 1/2" and 5/8" thicknesses, and 4'x4' and 4'x8' sizes




DEXcell[®]
BRAND
FA Glass Mat Roof Board

*A board
you'll
want to
adhere to.*

DEXcell® BRAND

Cement Roof Board

Whenever a building will be exposed to moisture or high humidity, DEXcell® BRAND Cement Roof Board is the smart choice. It is manufactured of Portland cement, lightweight aggregate and glass mesh that provides an exceptionally hard, durable surface.



DEXcell[®]
BRAND
Cement Roof Board


Key Features

- Suitable for all roof systems, including, but not limited to, fully adhered single-ply membrane, mechanically attached roof systems, modified bitumen, built-up roof systems, fluid applied, metal, and spray foam. It's also used on the roof side of parapet walls
- Excellent bond/pull-through uplift values
- Ideal for hot-mopped and torched applications
- Superior moisture resistance
- Impact resistant, extremely durable and dimensionally stable
- Available in 7/16" thickness and 4'x4' and 4'x8' sizes

*The board
to get,
wherever
it's wet.*


Typical Roof System Applications

Coverboard

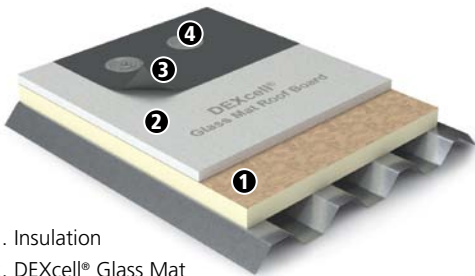


1. Insulation
2. DEXcell® Glass Mat Roof Board
3. Membrane
4. Fastener

Thermal Barrier / Vapor Barrier

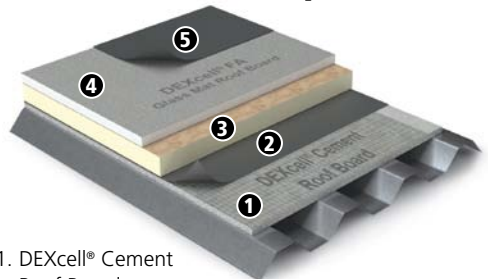

1. DEXcell® Cement Roof Board
2. Vapor Barrier
3. Insulation
4. DEXcell® FA Glass Mat Roof Board
5. Membrane

Thermal Barrier / Coverboard

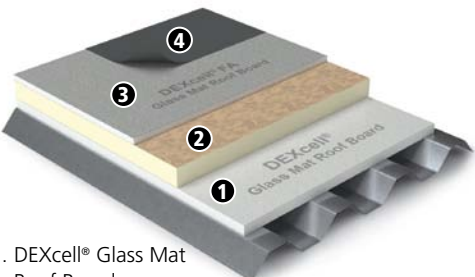

1. DEXcell® Glass Mat Roof Board
2. Insulation
3. DEXcell® FA Glass Mat Roof Board
4. Membrane



Consultants. Specifiers. System Manufacturers. Contractors. Owners.

National Gypsum is a solutions-focused company. Our goal is to help you make the best product choices by providing unmatched technical expertise. You can also expect world-class customer service and a solid commitment to on-time delivery.

Put simply, we want to be your trusted partner.

Building Long-term Partnerships.

Making high-quality products is just the beginning at National Gypsum. We're a company of consultants, known for providing in-depth technical expertise and resources to our customers. When you specify or purchase our products, you become our partner. And we'll treat you like one. To speak directly with customer service or the technical team, please call one of the numbers below.



Corporate Headquarters

National Gypsum Company
2001 Rexford Road
Charlotte, NC 28211
Phone: (704) 365-7300
Web: nationalgypsum.com
dexcellroofboard.info

Technical Information

Phone: (800) NATIONAL
(800) 628-4662
Fax: (800) FAX-NGC 1
(800) 329-6421

Customer Service

Phone: (844) DEXcell
(800) 339-2355
Fax: (866) 804-1087

National 
Gypsum®